

NEW! CRL LAGUNA SERIES WITH SOFTBRAKE BRAKING SYSTEM

- "Softbrake" Braking System for Quiet Closure
- Anti-Lift Feature for Added Safety
- All 316 Alloy Brushed Stainless Steel Construction
- Ideal for Interior Applications
- For Use With 3/8" or 1/2" (10 or 12 mm) Glass
- Comes With All Fasteners Needed for Either Flush (Countersunk) or Surface (Straight Hole) Mounting
- Adaptor Kits Available for Wood Door Applications



We have upgraded our popular **Laguna Series Sliding Glass Door System** to now include an a **NEW 'Softbrake' Braking Feature**. Through a combination of additions and very subtle changes, we have improved the performance and safety of the system. The **Laguna Series Sliding Glass Door System** can be installed on glass partitions or directly to the side of a sufficiently reinforced wall. The adjustable Top Rollers make final adjustments quick and easy, without the need to remove the door. Their smooth operation and solid stainless steel construction minimizes maintenance issues.


CRL provides you with all the glass attachment fasteners for either flush mounting, requiring a countersunk hole, or surface mounting, requiring a straight hole. The glass attachment fasteners accommodate either 3/8" or 1/2" (10 or 12 mm) toughened glass.

NOTE: Laminated glass cannot be used in these systems.

Standardized sets allow you to make planning and purchasing quick and easy for basic installations. All of our standard kits are now available in 'softbrake' versions.

DOOR SYSTEM LIMITATIONS

Maximum Door Weight:	220 lbs. (100 kg)
Maximum Panel Width:	53-1/2" (1.36 m)
Maximum Panel Height:	98-7/16" (2.50 m)
Maximum Track Length:	104" (2.64 m)

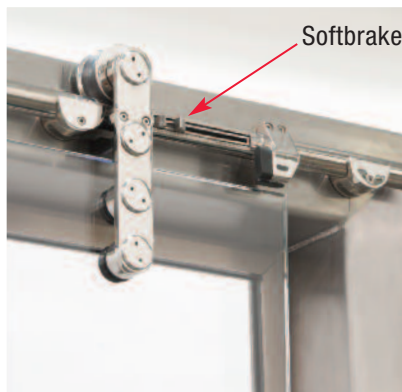

C.R. LAURENCE COMPANY
crlaurence.com | usalum.com | crl-arch.com

Phone: (800) 421-6144 Ext. 7770 | Email: partitions@crlaurence.com

CRL LAGUNA SERIES SLIDING GLASS DOOR SYSTEM WITH ANTI-LIFT FEATURES

- Anti-Lift Feature for Added Safety
- All 316 Alloy Brushed Stainless Steel Construction
- Ideal for Interior Applications
- For Use With 3/8" or 1/2" (10 or 12 mm) Glass
- Comes With All Fasteners Needed for Either Flush (Countersunk) or Surface (Straight Hole) Mounting
- Adaptor Kits Available for Wood Door Applications

We have upgraded our popular **Laguna Series Sliding Glass Door System** to now include an '**Anti-Lift**' feature. Through a combination of additions and very subtle changes, we have improved the performance, safety, and security while still offering a clean, simple look. The Laguna Series Sliding Glass Door System can be installed on glass partitions or directly to the side of a sufficiently reinforced wall. The adjustable Top Rollers make final adjustments quick and easy, without the need to remove the door. Their smooth operation and solid stainless steel construction minimizes maintenance issues.

CRL provides you with all the glass attachment fasteners for either flush mounting, requiring a countersunk hole, or surface mounting, requiring a straight hole. The glass attachment fasteners accommodate either 3/8" or 1/2" (10 or 12 mm) toughened glass. **NOTE:** Laminated glass cannot be used in these systems.

Standardized sets allow you to make planning and purchasing quick and easy for basic installations. We offer four different kits; two for wall mounting, and two for glass mounting. Available accessories give you the opportunity to customize the standard sets to accommodate the most imaginative designers.



DOOR SYSTEM LIMITATIONS

Maximum Door Weight:	220 lbs. (100 kg)
Maximum Panel Width:	53-1/2" (1.36 m)
Maximum Panel Height:	98-7/16" (2.50 m)
Maximum Track Length:	104" (2.64 m)



C.R. LAURENCE COMPANY
crlaurence.com | usalum.com | crl-arch.com

Phone: (800) 421-6144 Ext. 7770 | Email: partitions@crlaurence.com